

Manuals for use of Table-top Hydropress


Hydropress is designed to press shredded and soft fruit, such as grapes, apples, pears, or watermelons. Hydropress only applies to tap water press.

Note: Do not use air pressure.

- Hydropress can press any hard or soft fruit, but before pressing the fruit, please use a fruit crusher or high-speed crusher to crush the fruit. When the grapes are pressed, they must be removed from the stems and crushed.
- The hydropress can only work with water pressure, not with air pressure. There is a risk of explosion.

Importance: To prevent air from remaining in the membrane, unscrew the breather valve until the air is completely discharged.

- Hydropress must be protected from sharp objects and sunlight to avoid rupture.
- The hydropress can only be used in accordance with the provisions of its intended use instructions, not for commercial purposes.
- Please pay attention to the safety of the hydropress before use.
- Keep children away from the hydropress for safety.
- The hydraulic system is operated by people who are familiar with the relevant safety regulations and with sufficient experience and/or knowledge of the device.
- Clean products with mild detergent. Slightly disinfect the product before use.

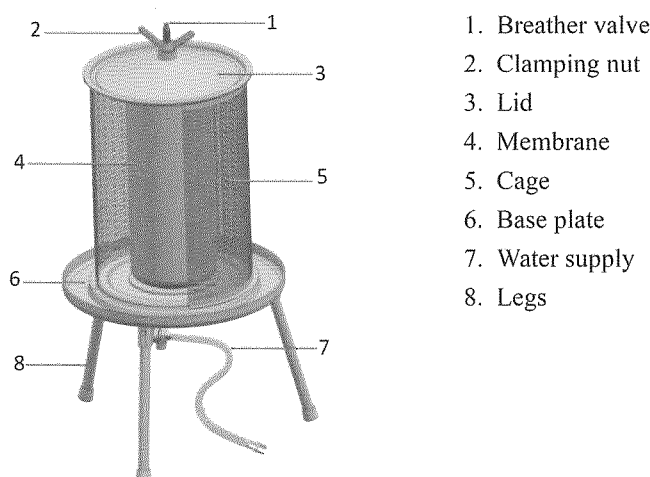

Installation and operation

1. Place the hydropress next to the kitchen faucet.
2. Turn off the inlet valve at the bottom of the press.
3. Connect the intake pipe to the inlet valve at the bottom of the press.
4. Remove the blister on the kitchen faucet and connect the other end of the inlet pipe to the kitchen faucet. If the thread specification on the faucet is different, it needs to be connected with the switch joint.
5. Take off the lid, put into the mesh bag, fold the inlet on the filter cartridge, and fold slightly at the bottom of the press. This will help to remove the fruit residue from the filter cartridge later.
6. Put the pulp inside the net bag and close the filter bag.

7. Cover the lid and twist the clamping nut by hand, do not force too much.
8. Place the container of the juice at the outlet of the hydropress.
9. Open the kitchen faucet and open the inlet valve at the bottom of the hydropress.
10. Close the breather valve as soon as the air is completely removed (water comes out).
11. In a short time, you will see the juice flowing out of the mesh on the side of the hydropress. There is about 3 bar of urban tap water pressure.
12. After the press is finished, close the intake valve and kitchen faucet.
13. The intake pipe is disconnected from the kitchen faucet.
14. Put one end of the inlet pipe into the pool and slowly open the inlet valve at the bottom of the hydropress for drainage.
15. Loose the breather valve at the top to release the pressure so that there is no pressure in the system.
16. Remove and clear cover.
17. Remove the filter cartridge and pull the pulp out with a filter bag. Clean press and filter bag.