


## Stand-Up Pouch SPECIFICATION

<b>1. GENERAL INFORMATION</b>		
Name of the product	<b>Stand-Up Pouch 5L „Red Apple“</b>	
The manufacturer's name, address	„AZ-Pack“, UAB, Pramonės pr. 4 K, 51326	
<b>Nominal capacity</b>	<b>5L</b>	
Purpose adaptation	Intended for packaging of all types liquid and semi-liquid food industry products	
Packing way (equipment, hand, etc.)	Hand	
Manufacturer has been audited according:	<b>ISO 9001:2015, ISO 14001:2015</b>	
<b>2. DIMENSIONS</b>		
	Dimen. (mm)	
<b>IW.</b> - Inner width	274	
<b>IH.</b> - Inner length	282	
Outer width	290	
Outer length	345	
<b>GB.</b> - Gusset bottom	72	
<b>GT.</b> - Gusset top	45	
<b>HP.</b> - Handle panel	50	
<b>T.</b> - Distance gland edge to bottom edge of pouch.	25	
Tolerance on all dimensions : ±5mm		
<b>3. COMPLEMENTS-MATERIAL</b>		
	<b>TAP</b>	<b>GLAND</b>
Material	PP COPOLYMER+TPE	LLDPE
Colour	Black-Red	Natural
<b>4. Material</b>		
Material	PET12/PE/EVOH/PE180	
Colour	<b>„Red Apple“</b>	

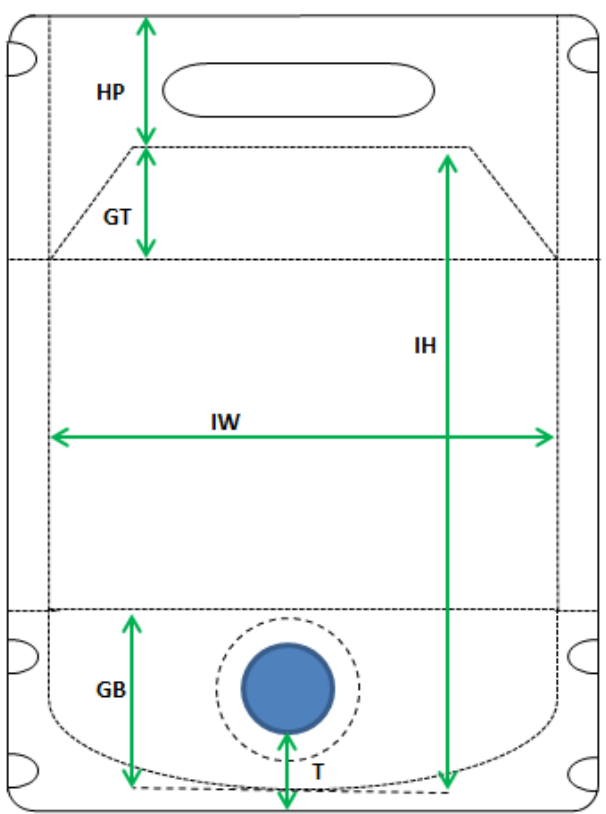

## 5. Properties


Properties		Method/Test conditions	Units	Typical values	Limit values
Thickness			μm	192	-5/+10%
Unit weight			g/m <sup>2</sup>	199,2	± 10 %
Width			mm		± 1 mm
Coefficient of friction (dynamic, f/f)		ISO 8295 / DIN 53375		0,30	± 0,10
Tensile strength	MD TD	ISO 527 / DIN 53455	N/mm <sup>2</sup>	27 27	
Breaking elongation	MD TD	ISO 527 / DIN 53455	%	90 80	
Water vapour permeability		ASTM E-96 (38°C /90%RH)	g/m <sup>2</sup> /24h	< 2	
Oxygen transmission		ASTM D 3985-95 (23 °C/0%RH)	cm <sup>3</sup> /m <sup>2</sup> /24h	1	
Heat seal range*		Internal method 2-3sec/320kPa	°C	170-180	


\*Tested in laboratory conditions. The selection of sealing temperatures depends on the characteristic of heat sealing bars and packing process speed.

## 6. PRODUCT IDENTIFICATION

Any individual Bag-in-Box bag will have the following identification in one of its sides:

„ID: Z 19031062520 10:48:25 AZ-PACK   “  
 19031062520 10:48:25– Product ID  
 AZ-PACK – name of manufacturer

 - Recycling code

 - Food use symbol

### • USAGE

Stand-up Pouch's usage conditions are described below:

- To preserve the properties of the liquid, the bag must be filled to its nominal capacity as specified in point 1 (Nominal capacity), so that no more air is left inside the pouch than it fits in the neck of the gland.
- Protect the pouches from physical and mechanical damage. Physically or mechanically damaged layers may lose their barrier properties, which may affect oxygen ingress, fluid leakage.
- Strict adherence to the filling liquid technology is required when filling.
- **Filled pouch can not be lifted up holding by the tap!!!**
- Do not bend a gland. Any physical or mechanical damage can result in gland cracking.
- Filling temperature ranging from 4 to 100°C.
- Suitable for contact with all types of liquid, semi-liquid foods products containing water, acid and alcohol, milk and fat products.
- No weight may be placed on the top of the packaging.
- The optimum usage conditions are 10-30°C and 70-40% of relative humidity. On very specific occasions, the bags can be stored at a temperature of 4°C and 40°C (minimum and maximum

respectively). If so, it is necessary to acclimatize them to the optimum conditions 24-48h before the filling process takes place.

**If the rules of usage are not followed, renders the customer full responsibility for the quality of the bags.**

## 7. TRANSPORTATION AND STORAGE

Empty Bag-in-Box bags must be stored in a fresh and dry place, out of range of any heat source and kept in its original package. Temperature range should be between 10°C to 30°C and relative humidity should be from 40% to 65%. Direct exposure to sun may cause changes in the characteristics and color of the product, as well as deformation. To improve the performance of our products, it is advisable to store it, at least for 24 hours, in similar conditions (temperature and relative humidity) before filling.

## 8. EXPIRY

Warranty period of pouch's is 12 months, but can be used for 24 months the date of manufacture. The warranty is only valid if the product are stored and used in the conditions listed above.

## 9. PACKAGING

	Dimensions (mm)	Units (pcs.)	Protection
Cardboard box	800*600*230	150	Plastic bag

Quality specialist




Monika Startė